




# TABLE OF CONTENTS

A STATE OF THE PARTY OF THE PAR	COMPANY BIO	3
	SR-25 SERIES RIFLES	4-13
	SR-30 SERIES RIFLES	14-19
	SR-15 SERIES RIFLES	20-29
	UPPER RECEIVER ASSEMBLY KITS—	30-31
	SIGNATURE REDUCTION DEVICES—	32-35
AND RESIDENCE OF THE PARTY OF T	MUZZLE DEVICES —	36-39
	HANDGUARDS —	40-47
	CONTROL ACCESSORIES	48-56
	RIFLE PARTS MISCELLANEOUS —	57-61
	BIPOD	62-63
	SIGHTS	64-65
	NEW ACCESSORIES	66
	KAC GEAR —	68
	KNIGHTVISION	69



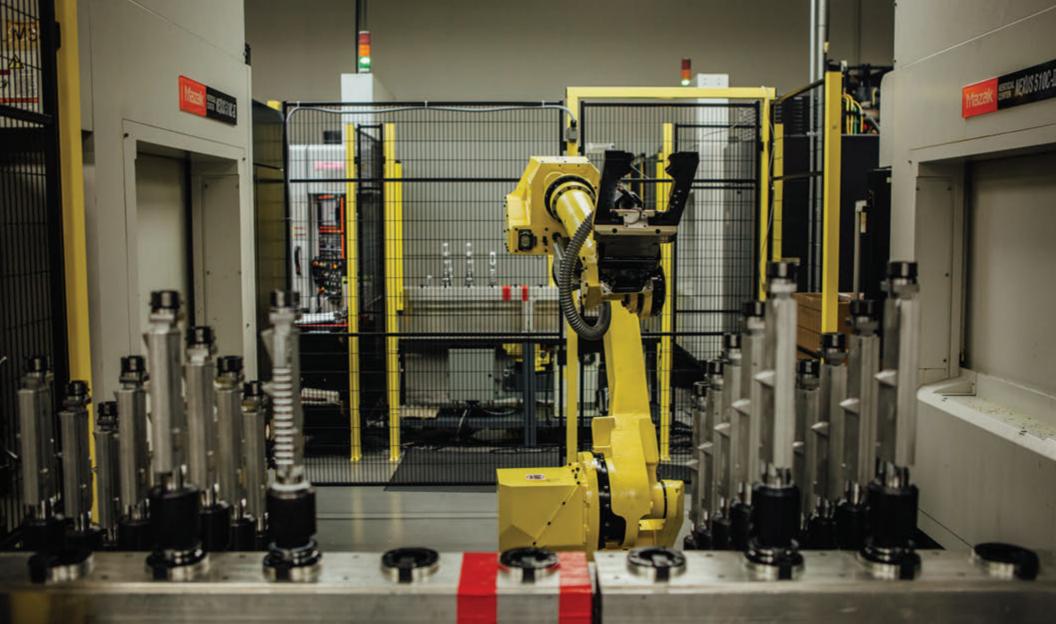



## SR-25 SERIES

The SR-25 E2 series of rifles is the end result of decades of improvement and refinement to the AR-10 type rifle. While each model is oriented to an application, they all share high reliability, long critical part life and intuitive ambidextrous controls. Tested to and validated by the harshest combat conditions, they prove to perform as required. Barrel and bolt life are significantly increased, reducing the need for part replacement and extending maintenance cycles. An ambidextrous bolt release, selector and magazine release offer the left-handed user

the ergonomic advantages inherent to AR-15 based controls, as well as giving right-handed users alternate methods of manipulation to increase efficiency of movement. The Drop-In 2-Stage Trigger serves double duty as an aid to long range precision marksmanship and also enabling surgical speed while shooting at close range. The trigger is not susceptible to change due to fouling or wear. A 7.62QDC Flash Suppressor reduces flash and ground disturbance and also supports KAC QDC Signature Reduction Devices, right out of the box.



## SR-25 E2 **\CC**



SR-25 E2 ADVANCED COMBAT CARBINE M-LOK Barrel 16"(40 cm), Lightweight, Chrome Lined, 5R Cut 1:10 Twist

Caliber 7.62 mm NATO / .308 Win

Weight 8.4 lbs (3.8 kg)

Length 35.75"(91 cm) to 39.5"(100 cm)

SR-25 E2 ADVANCED COMBAT CARBINE KEYMOD

P/N: 31893

P/N: 31243

MULTI LUG IMPROVED E2 BOLT

M-LOK MOUNTING SYSTEM



2 STAGE MATCH TRIGGER



QDC QUICK DISCONNECT COUPLING



## SR-25 E2 APC



SR-25 E	2 ADVANCED PRECISION CARBINE M-LOK P/N: 3195	5
Barrel	16"(40 cm), Medium Profile, 5R Cut 1:10 Twist	
Caliber	7.62 mm NATO / .308 Win	
	9 lbs (4.1 kg)	
Length	35.75"(91 cm) to 39.5"(100 cm)	

SR-25 E2 ADVANCED PRECISION CARBINE KEYMOD

P/N: 31184









# SR-25 E2 SBR DSR



SR-25 E	2 SHORT-BARRELED RIFLE DSR M-LOK P/N: 3195	58
Barrel	14.5"(36.8 cm) 5R Cut 1:10 Twist, Dedicated Suppresso	or
Caliber	7.62 mm NATO / .308 Win	
Weight	9.05 lbs (4.1 kg)	
Length	35.25"(89.5 cm) to 39"(99 cm)	













## SR-25 E2 **\PR**



P/N: 31198

SR-25 E	2 APR ADVANCED PRECISION RIFLE M-LOK	P/N: 31961
Barrel	20"(51 cm) 5R Cut 1:10 Twist	
	7.62 mm NATO / .308 Win	
	10.5 lbs (4.8 kg)	
Length	39.75"(101 cm) to 43.5"(110.5 cm)	

SR-25 E2 APR ADVANCED PRECISION RIFLE KEYMOD

M-LOK MOUNTING SYSTEM



2 STAGE MATCH TRIGGER



QDC QUICK DISCONNECT COUPLING



### SR-30 SERIES

The SR-30 takes advantage of the .300BLK cartridge, enabling a 9.5" barrel to be as capable as an 11.5" 5.56mm SBR. KAC's proprietary mid-length gas system increases reliability, durability, minimizes leakage and ensures more consistent operation in harsh conditions, with or without an attached sound suppressor. The Mod 2 gas block is secured with a locking ring, which results in a more rigid barrel due to the elimination of taper pin grooves. This removes the need for individually fit gas blocks. An improved E3 round-lug bolt design enhances function and increases bolt life far beyond the industry standard. The URX4 handguard reduces weight through use of negative-space mounting systems and an integral barrel nut. An ambidextrous bolt release, selector and magazine release offer left-handed users the ergonomic

advantages inherent to AR-15 based controls. This also provides the right-handed users alternative methods of manipulation to increase efficiency of movement. The Drop-In 2-Stage Trigger serves double duty as an aid to long range precision marksmanship and also enabling surgical speed while shooting at close range. KAC QDC supporting muzzle devices are included, and the rifles are ready to host a suppressor with no permanent changes needed to ensure long-term reliability. Receiver End Plate with Ambidextrous QD Sling Swivel Sockets, 6-Position Collapsible Stock, Fully Ambidextrous Lower Receiver Controls, Extended Charging Handle Latch, Folding Front and 200-600 Meter Rear Micro Iron Sights are standard features of the SR-30.



### SR-30



**SR-30 M-LOK** P/N: 31970

Barrel 9.5"(24 cm) 1:7 Twist, Chrome Lined

Caliber 300 Blackout (7.62 x 35 mm)

Weight | 6.2 lbs (2.81 kg)

Length 27.5"(69.2 cm) to 30.75" (70.47 cm)

SR-30 KEYMOD P/N: 31759

AMBIDEXTROUS CONTROLS













## SR-30 DSR



SR-30 DSR M-LOK

P/N: 32401

Barrel 9.5"(24.13 cm) 1:7 Twist, Dedicated Suppressor

Caliber | .300 Blackout (7.62 x 35 mm)

Weight | 7.2 lbs (3.3 kg)

Length 32"(81.28 cm) to 35.5" (90.17 cm)

SR-30 DSR KEYMOD P/N: 32400

M-LOK MOUNTING SYSTEM

MULTI LUG IMPROVED E3 BOLT



2 STAGE MATCH TRIGGER



300 BLACKOUT



### SR-15 SERIES

The SR-15 E3 Mod 2 line represents the pinnacle of the unique and revolutionary Stoner-designed operating system. The Mod 2 line features a proprietary mid-length gas system that increases reliability and durability, while also reducing felt recoil. This minimizes leakage, ensuring more consistent operation in harsh conditions, with or without an attached sound suppressor. The Mod 2 gas block is secured with a locking ring, which results in a more rigid barrel due to the elimination of taper pin grooves. This removes the need for individually fit gas blocks. An improved E3 round-lug bolt design enhances function and increases bolt life far beyond the industry standard. The URX4 handguard reduces weight through use of negative-space mounting systems and an integral barrel nut. An ambidextrous bolt release, selector and magazine release

offer left-handed users the ergonomic advantages inherent to AR-15 based controls, as well as giving right-handed users alternative methods of manipulation to increase efficiency of movement. The Drop-In 2-Stage Trigger serves double duty as an aid to long range precision marksmanship and also enabling surgical speed while shooting at close range. KAC QDC supporting muzzle devices are included and the rifles are ready to host a suppressor with no permanent changes needed to ensure long-term reliability. Receiver End Plate with Ambidextrous QD Sling Swivel Sockets, 6-Position Collapsible Stock, Fully Ambidextrous Lower Receiver Controls, Extended Charging Handle Latch, Folding Front and 200-600 Meter Rear Micro Iron Sights are standard features of the SR-15 E3 Mod 2.



## SR-15 E3 MOD 2

QDC QUICK DISCONNECT COUPLING



SR-15 E3 MOD 2 KEYMOD

Weight | 6.55 lbs (2.97 kg)

Length | 33.5"(85.09 cm) to 36.5"(92.7 cm)

P/N: 31030



## SR-15 E3 MOD 2 CARBINE



SR-15 E	3 MOD 2 CARBINE M-LOK	P/N: 31946
Barrel	14.5"(37 cm) 1:7 Twist, Hammer Forged, Chro	me Lined
Caliber	5.56 mm NATO	
Weight	6.4 lbs (2.9 kg)	
Length	32"(81 cm) to 35"(89 cm)	<i>)</i>

SR-15 E3 MOD 2 CARBINE KEYMOD

P/N: 31274









# SR-15 E3 MOD 2 CQB



P/N: 31273

SR-15 E	3 MOD 2 CQB M-LOK	P/N: 31952
Barrel	11.5"(29 cm) 1:7 Twist, Hammer Forged, Chror	me Lined
Caliber	5.56 mm NATO	
Weight	6.25 lbs (2.83 kg)	
Length	29"(73.6 cm) to 32"(81.3 cm)	

SR-15 E3 MOD 2 CQB KEYMOD

₹j}

2 STAGE MATCH TRIGGER





## SR-15 E3 MOD 2 LPR



P/N: 31733

SR-15 E	3 MOD 2 LIGHT PRECISION RIFLE M-LOK	P/N: 31973
Barrel	18"(45 cm) 1:7 Twist, Stainless Steel	
Caliber	5.56 mm NATO	
Weight	7.4 lbs (3.35 kg)	
Length	35.25"(89.53 cm) to 38.5"(97.8 cm)	<i>)</i>

SR-15 E3 MOD 2 LIGHT PRECISION RIFLE KEYMOD









### UPPER RECEIVER ASSEMBLY KITS 5.56



### SR-30 UPPER RECEIVER ASSEMBLY KITS



### SIGNATURE REDUCTION DEVICES



## LEGACY SUPPRESSORS







#### SR-25 RIFLE SUPPRESSOR 7.62/.300 PN: 98440

Gate Latch Connector attaches to SR-25 gas block. For rifles without muzzle device such as the Mk 11 Mod 0 and SR-25 ER. Length: 12.25" Weight: 29.9 oz NSN: 1005-01-474-0197

### M110 SUPPRESSOR 7.62/.300 PN: 24611

Connects to SR-25 gas block. For rifles with M110 flash hider only. Gate Latch Connector Length: 14" Weight: 32.0 oz NSN: 1005-01-542-4487

#### **H&K USP-T .45 CALIBER SUPPRESSOR PN: 97225**

Threaded Connection for USP Pistols Length: 7.5" Weight: 15.4 oz

### MK23.45 CALIBER SUPPRESSOR PN: 94368

Threaded Connection for Mk23 Pistols Length: 7.5" Weight: 15.4 oz NSN: 1005-01-435-1917

### SUPPRESSORS 5.56



### 5.56MM QDSS NT4 (BLACK) KIT PN: 96062-1

Connects to M4QD and Triple Tap Compensator. NT4 Gate Latch Connector. Length: 6.5" Weight: 22 oz NSN: 1005-01-437-0324



### 5.56MM QDSS NT4 (FLAT DARK EARTH) KIT PN: 96062-2

Connects to M4QD and Triple Tap Compensator. NT4 Gate Latch Connector. Length: 6.5" Weight: 22 oz NSN: 1005-01-568-4844



#### 5.560DC/COB SUPPRESSOR P/N: 30192

Connects to all 5.56 QDC Muzzle Devices. QDC Connection. Available in Black and Flat Dark Earth (-BLK) (-FDE). Length: 5" Weight: 13.2 oz



#### 5.560DC SUPPRESSOR PN: 30123

Connects to all 5.56 QDC Muzzle Devices. QDC Connection. Available in Black and Flat Dark Earth (-BLK) (-FDE). Length: 6.5" Weight: 16.7 oz









## M110 SUPPRESSOR 7.62/.300 PN: 24611

Connects to SR-25 gas block. For rifles with M110 flash hider only. Gate Latch Connector Length: 14" Weight: 32.0 oz NSN: 1005-01-542-4487

## 7.62QDC/CQB SUPPRESSOR 7.62/.300 PN: 30179

Connects to 7.62 MAMS and 7.62 Flash Hider. QDC Connector. Available in Black and Flat Dark Earth Length: 6.43" Weight: 14.1 oz
NSN: 1005-01-601-1822

## 7.62QDC SUPPRESSOR 7.62/.300 PN: 30178


Connects to 7.62 MAMS and 7.62 Flash Hider. QDC Connector. Available in Black and Flat Dark Earth Length: 7.78" Weight: 19.6 oz NSN: 1005-01-623-8914

## MUZZLE DEVICES



# 5.56 MUZZLE DEVICES







P/N: 32316



P/N: 30555



P/N: 30168

P/N	NAME	DESCRIPTION	CALIBER	LENGTH	WEIGHT	THREAD
93048	M4QD FLASH HIDER KIT	Flash Hider Compatible with QDSS-NT4 Suppressor.		1.88″ (46 mm)	2.4 oz (68g)	1/2″x 28
32316	NT4 MAMS KIT	Compensator Compatible with QDSS-NT4 Suppressor.	5.56	2.10" (71 mm)	2.3oz (65g)	1/2″x 28
30555	556 QDC FLASH ELIMINATOR KIT	3-Prong Flash Hider for QDC Suppressors.5.56 QDC Suppressor Compatible.	5.56	2.15" (53 mm)	2.3 oz (65g)	1/2″x 28
30168	556 MAMS MUZZLE BRAKE KIT	Brake For Connecting QDC Suppressors.5.56 QDC Suppressor Compatible.	5.56	2.20" (56mm)	2.3 oz (65g)	1/2″x 28

All Kits Include 7-Piece Shim Set & Rocksett Adhesive

# MUZZLE DEVICES



# 7.62 MUZZLE DEVICES









P/N: 25877

P/N: 31194

P/N: 30191 P/N: 30696


P/N: 30169 P/N: 30598

P/N	NAME	DESCRIPTION	CALIBER	LENGTH	WEIGHT	THREAD
25877	M110 FLASH HIDER KIT	M110 Flash Hider for use with M110 Suppressor.	UP TO .30	2.6" (65 mm)	3.4 oz (96.5g)	3/4" x 24
31194	762QDC 3-PRONG FH KIT	7.62 QDC Suppressor Compatible 3-Prong Flash hider.	UP TO .30	2.8" (70 mm)	4.9 oz (139g)	3/4" x 24
30191	762QDC FLASH HIDER KIT	762QDC Suppressor Compatible Flash Hider.	UP TO .30	3.1"	5.6 oz (159g)	3/4" x 24
30696	•	,	UF 10.30	(78 mm)	5.9 oz (167.5g)	5/8"x 24
30169	762MAMS KIT	762QDC Suppressor Compatible Multi-Axis Muzzle Stability Brake.	UP TO .30	3.1"	4.8 oz (136g)	3/4" x 24
30598	7 OZIVIAIVIS KIT	702 QUE Suppressor computable multi Axis muzzle stubility bruke.	UP 10.30	(78 mm)	5.1 oz (144.5g)	5/8" x 24


All Kits Include 7-Piece Shim Set & Rocksett Adhesive





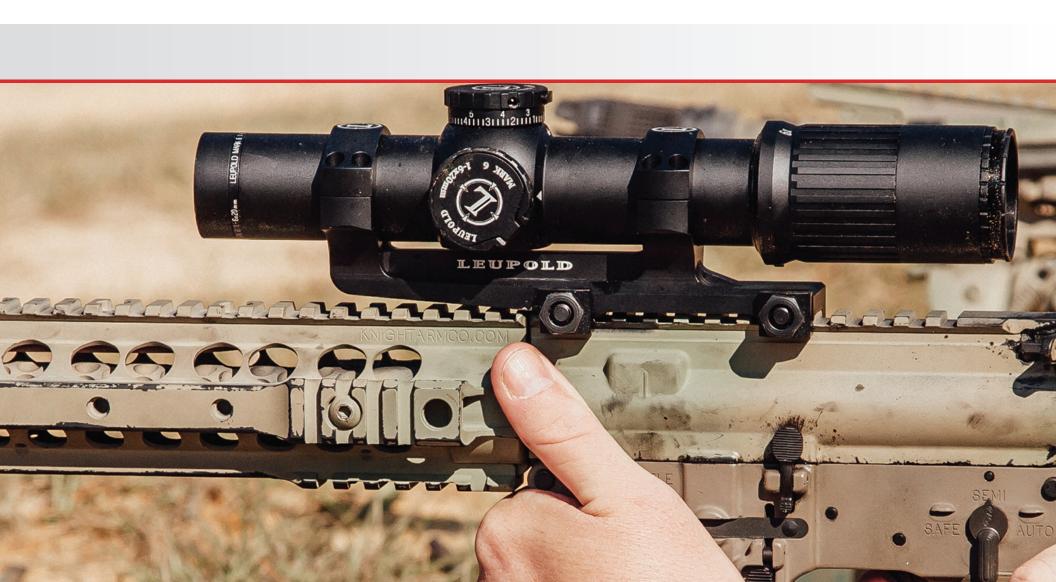

# HANDGUARDS URX4

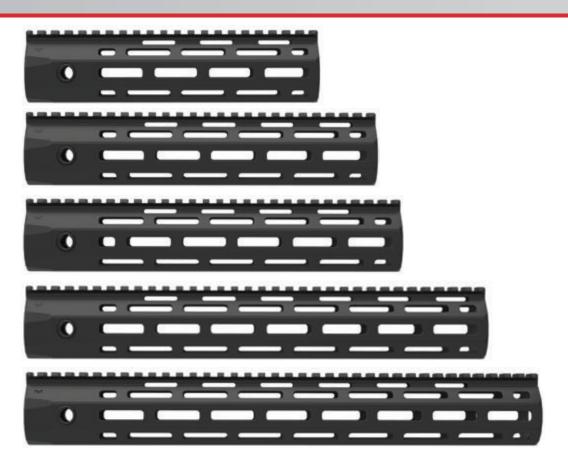





## URX 4 5.56 M-LOK P/N: 32304-0850

Forend Kit, URX 4 5.56 Length: 8.5" Weight: 8.96 oz Keymod P/N: 30738





## URX 4 5.56 M-LOK P/N: 32304-1000

Forend Kit, URX 4 5.56 Length: 10.0" Weight: 10.08 oz Keymod P/N:30740





## URX 4 5.56 M-LOK P/N: 32304-1075

Forend Kit, URX 4 5.56 Length: 10.75" Weight: 10.2 oz Keymod P/N:31207





## URX 4 5.56 M-LOK P/N: 32304-1300

Forend Kit, URX 4 5.56 Length: 13.0" Weight: 12.7 oz Keymod P/N:30736





Forend Kit, URX 45.56 Length: 14.5" Weight: 13.8 oz Keymod P/N:30742



# HANDGUARDS URX 3 & 3.1











## URX 3 P/N: 30210

5.56, (Armorer Install) Length: 8.0" Weight: 8.6 oz



## URX 3.1 P/N: 30590

5.56, (Armorer Install) Length: 10.75" Weight: 11.4 oz



## URX 3.1 P/N: 30325

5.56, (Armorer Install) Length: 13.5" Weight: 13.8 oz



## URX 3.1 P/N: 30259

7.62, (Armorer Install) Length: 13.5" Weight: 14.2 oz





















# M-LOK CONTROL ACCESSORIES



M-LOK 3" RAIL SECTION (5 SLOT)

section of MIL-STD-1913 Picatinny rail for the addition of tactical accessories. Designed specifically for the URX 4 handquard, this rail section is also compatible with any other rifle handquard that has a handquard at any position from 1:30 to 11:30 in relation to the top construction. M-LOK interface, Aluminum construction.



This KAC M-LOK Accessory Rail is 3" in length and provides a 5 slot 
The KAC M-LOK mount for SureFire M300 and M600 Scout Lights is a 
The KAC M-LOK Skeletonized Barrier Stop eliminates all unnecessary

12:00 rail Aluminum construction



P/N: 31906 M-LOK BARRIER STOP

lightweight, direct-attach mounting platform that replaces the OEM weight while still being robust enough for hard-use. The serrated The KAC M-LOK Barrier Stop attaches quickly and securely to an mount. The mount can be positioned to place the light close to the front edge will bite into most surfaces at any angle of contact. Steel M-LOK interface. Aluminum



P/N: 31916 M-LOK BARRIER STOP WITH INTEGRAL QD SOCKET




M-LOK SLING MOUNT

The KAC M-LOK Sling Mount attaches quickly and securely to an M-LOK interface. The sling mount is compatible with pushbutton sling swivels (sold separately). Keymod QD Sling Mount P/N: 30708





# KEYMOD CONTROL ACCESSORIES





## **KEYMOD FLAT PANEL KIT**

## P/N: 31190

The Knight's Keymod Flat Panel Kit includes a set of seven polymer rail panels. Each textured panel snaps securely to any bare section of Keymod equipped rail, providing a more positive gripping surface and also insulating the support hand from barrel heat. While designed for the URX 4, these panels will also fit any other rifle handguard that has a Keymod interface. Available in Flat Dark Earth-FDE, and Black-BLK.



P/N: 30714



P/N: 30717



P/N: 30712



P/N: 30710



P/N	NAME	LENGTH
30714	KEYMOD 5-Slot Rail	3"
30717	30717 KEYMOD 7-Slot Rail	
30712	KEYMOD 9-Slot Rail	4.5"
30710	KEYMOD Full Side Rail	12"

## CONTROL ACCESSORIES KEYMOD



### **KEYMOD SCOUT LIGHT MOUNT**

The KAC Keymod mount for SureFire Scout Lights is a Textured handstop provides a reference point for the support



### P/N: 31232 KEYMOD HANDSTOP

liahtweight, direct-attach mounting platform. The mount hand that helps the shooter to acquire a consistent grip on



### KEYMOD BARRIER STOP

P/N: 30795

The KAC Skeletonized Keymod Barrier Stop eliminates all to clip a slina directly to the device via an HK-style clip. Aluminum construction.



## **KEYMOD BELT HOOK ASSEMBLY**

The KAC Keymod Belt Hook Assembly attaches quickly and unnecessary weight while still being robust enough for securely to the URX 4 rail or any other rifle handauard that can be positioned to place the light tight to the handguard at any position from 1:30 to 11:30. Aluminum construction.

\*\*Dark Earth-FDE, and Black-BLK.\*\*

\*\*Dark Earth-FDE, incorporates a QD sling swivel socket, as well as the ability freeing the user's hands to perform other tasks. Aluminum construction.

P/N: 30750



## **KEYMOD SLING HOOK ASSEMBLY**

The KAC Keymod Sling Hook Assembly was designed for uses of single point slings. When both hands are required for non-gun-related tasks, the user may snag a portion of the sling with the hook, drawing the rifle's forend snugly to the side of the body instead of dropping the gun to bounce freely between the legs. It attaches and securely to the URX 4 or any other rifle handauard with a Keymod interface. Aluminum construction.

P/N: 30749






## **KEYMOD OD SLING MOUNT**

P/N: 30708

The KAC Keymod Sling Mount attaches quickly and securely to the URX 4 or any other rifle handquard that has a Keymod interface. The sling mount is compatible with push button slina swivels (sold separately).



# CONTROL ACCESSORIES PANEL KITS URX 3.1






## **URX 3.1 DELUXE RAIL PANEL KIT**

P/N: 30409

1-single hole hand stop with long installation screw, 3-slim 2 hole panels, 2-standard 2 hole panels, 2 standard 3 hole panels, 1 standard 2 hole hand stop panel, 3-8 rib rail sections, 10 installation screws, 5-square backing nuts. Available in Flat Dark Earth-FDE, Taupe-TAU, Tan-TAN, and Black-BLK.






## **URX 3.1 PANEL KIT**

P/N: 30408

1-single hole hand stop with long installation screw, 3-slim 2 hole panels, 2-standard 2 hole panels, 2 standard 3 hole panels, 1 standard 2 hole hand stop panel, 3-8 rib rail sections, 10 installation screws, 5-square backing nuts. Available in Flat Dark Earth-FDE, Taupe-TAU, Tan-TAN, and Black-BLK.





## **URX 3.1 PANEL KIT**

P/N: 30410

2 - standard 3 hole panels, 1 - slim 2 hole panel, 1 - standard 2 hole hand stop panel, 8 - installation screws, 4 - square backing nuts. Available in Flat Dark Earth-FDE, Taupe-TAU, Tan-TAN, and Black-BLK.

# URX 3.1 & MIL-STD-1913 CONTROL ACCESSORIE





Attaches to URX 3.1 handquard systems, Includes attachment screw and retention nut. Available in Flat Dark Earth-FDE, and Black-BLK.

P/N: 30411



**URX RAIL 7 SLOT** 

MIL-STD-1913 rail section. Polymer construction, Available in Flat Dark Earth-FDE, and Black-BLK. P/N: 30412-ALU constructed of aluminum.

P/N: 30412



**URX 3 & 3.1 QD SLING SWIVEL MOUNT KIT P/N: 30491** 

Attaches to URX 3.1 handguard systems, Includes attachment screw and retention nut.



**URX 3.1 SLING HOOK** 

Compatible with both URX III and URX 3.1 handquards.



P/N: 30700 URX 3.1 BELT HOOK Compatible with URX 3.1 handguards. P/N: 30701



SWIVEL MOUNT ASSEMBLY

rail to allow for optimal operator customization. NSN: 1005-01-498-4854





P/N: 98720 RUBBERIZED THUMB REST

Push button sling swivel mount that fits any MIL-STD-1913 This rubberized thumb rest features an elevated stop and textured grip to accommodate an isosceles shooting stance. Designed to be installed on a MIL-STD-1913 top rail.





P/N: 30537 TERMINATOR HANDSTOP WITH OD SLING SWIVEL SOCKET

P/N: 25460

Attaches to MIL-STD 1913 accessory rail with a single flat-head screw.

# CONTROL ACCESSORIES MIL-STD-1913







P/N	NAME	NSN #	
95047	11 Rib Panel Black		
95047-GRN	11 Rib Panel Green		
95047-TAN	11 Rib Panel Tan	NSN: 1005-01-553-8053	
95047-TAU	11 Rib Panel Taupe		
97169	9 Rib Panel Black	N/A	
97168	6 Rib Panel Black	N/A	
97167	5 Rib Panel Black	NSN: 1005-01-453-4221	
97166	4 Rib Panel Black	NSN: 1005-01-488-5573	
97164	2 Rib Panel Black	N/A	







# RIFLE PARTS MISCELLANEOUS



AMBI MAGAZINE RELEASE

Left-side magazine release for AR pattern rifles. Oversized release button. Weight: 3 oz.



## **ENHANCED MAGAZINE RELEASE KIT**

Enlarged engagement area button is easily installed by replacing any standard, mil-spec magazine release button. Requires no modification to the host firearm.



#### P/N: 32394 MODULAR SELECTOR KIT SEMI-AUTO P/N: 32393

Kit includes multiple selector options to suit individual shooter preferences. There is the choice of any combination of short or long left or right side selectors, and a semi-flush indicator that provides a visual indication of the rifle's firing mode only. Installation is a simple, drop-in procedure, Compatible with both SR-15/AR-15 and SR-25 platforms.



## SEMI-AUTO AMBI SAFETY SELECTOR P/N: 25776

Ambidextrous Safety Selector available with a beveled selector or standalone headpiece for optimal operator customization.



SEMI-AUTO 2 STAGE DROP-IN TRIGGER P/N: 25362

2-Stage, Match 4.5 lbs pull. Weight 2.4 oz NSN:1005-01-592-0663




P/N: 98076-1

P/N: 31300

**SR-25 FIELD REPAIR KIT SR-25 E2 FIELD REPAIR KIT** 

Firing Pin, Extractor, Bolt Rings, etc. for SR-25 Weight 1.2 oz

NSN:1005-01-562-9451 (98076-1)



SR-15 FIELD REPAIR KIT

Firing Pin, Extractor, Bolt Rings, etc. for SR-15 Weight 1.2 oz.



P/N: 23339-1 SR-15 E3 BOLT ASSEMBLY

This is a Complete Bolt Assembly with all internal parts installed. The E3 Bolt is compatible with Knight's Armament E3 Barrel Extensions only.



P/N: 20434 SR-25 20 ROUND MAGAZINE P/N: 98036-1

Constructed of heat-treated steel, this magazine also features a positive locking clip on its base plate. NSN: 1005-01-473-1403



SR-25 10 ROUND MAGAZINE P/N: 98037-1

Constructed of heat-treated steel, this magazine also features a positive locking clip on its base plate. NSN: 1005-01-473-1405

# RIFLE PARTS MISCELLANEOUS

P/N: 97079



AMBI QD SLING SWIVEL MOUNT

Receiver end plate integrates a QD sling swivel socket on either side for ambidextrous use. Free rotation



P/N: 24103 AMBI OD SLING SWIVEL MOUNT

Receiver end plate integrates a QD sling swivel socket on either side for ambidextrous use. Rotation limited. NSN: 1005-01-601-5594 with OD swivel P/N: 24103-1



P/N: 22051-1 BALL LOCK SLING SWIVEL EYELET

KAC Ball Lock Sling Swivel Eyelet installs into QD sling swivel sockets and locks in place via a set screw.



P/N: 21317 PUSH BUTTON SLING SWIVEL

This KAC Heavy Duty Push Button Sling Swivel has a 1-1/4" loop. For use with QD sling swivel sockets.



BOREROD GUIDE P/N: 30640

SR-25 7.62 bore rod guide assembly. Polymer construction.



AR-15 PATTERN AMBI CHARGING HANDLE P/N: 31177 SR-25 PATTERN AMBI CHARGING HANDLE P/N: 30538

Intermediate sized latch pads are easily accessible and permit manipulation of the charging handle with a pinch-grip, index finger hook, or knife-hand from either side of the receiver, without over-protrusion posing a snag hazard. Innovative design will not cause the handle to lock-up even if one of the latches is damaged.



## CONTROL ACCESSORIES BIPOD

## **KAC PRECISION BIPOD**

Highly adjustable bipod with swivel and track capability. Legs can be independently deployed to 6 positions: 0, 45, 67.5, 90, 135, and 180 degrees. With the legs at 90 degrees on a flat surface it provides 6.875 to 9.25 inches of height from the bottom rail in 5 easily selectable increments. Unobtrusive, easily manipulated lever enables full yaw release and lock. Tension screw adjusts yaw drag, and may be placed on either side of base or removed completely. Single push-button retention feature allows single-handed mounting and dismounting.

P/N: 31693



## KAC PRECISION BASE FOR HARRIS BIPODS P/N: 31761

Provides the swivel and tracking features of the KAC Precision Bipod, but allows a retrofit of the Harris-S Series type bipod leg assembly.



## QD BIPOD MOUNT SWIVEL

P/N: 30526

Quick detach bipod mount that fits any MIL-STD-1913 rail.

Allows limited swivel movement along the barrel's axis. Compatible with Harris S-Series Bipods only.



## MWS BIPOD ADAPTER

P/N: 98060

Designed for lower rail. Includes QD Stud 97030. NSN: 1005-01-468-0350

## SIGHTING ACCESSORIES



300M REAR FLIP SIGHT

300m Rear Flip Sight which mounts to any MIL-STD-1913 rail system. Removable peep insert to expose 5mm diameter "qhost ring" aperture. NSN: 1005-01-449-6306



P/N: 97082 600M REAR FLIP SIGHT

600m Rear Flip Sight which mounts to any MIL-STD-1913 rail system, NSN: 1005-01-449-6868



P/N: 98474 FOLDING M4 FRONT SIGHT

Originally designed for the US military's SOPMOD rifle program, the Knight's M4 Folding Front Sight is a low profile backup sighting solution that is designed to be attached to the top rail of a rifle's handguard. ISN: 1005-01-473-1410 Also available in Taupe. 99051-TAU



P/N: 99051 MICRO 300M FLIP UP REAR SIGHT



P/N: 25475 MICRO 600M FLIP UP REAR SIGHT

P/N: 25650

Micro 600m Rear Flip Sight which mounts to any MIL-STD-1913 rail system. Weight 1.5 oz, Length Folded 2.14" NSN: 1005-01-581-5324



## MICRO FLIP UP FRONT SIGHT

Micro Front Flip Sight which mounts to any MIL-STD-1913 rail system. Tool-less adjustments. NSN: 1005-01-598-4529



## P/N: 25654 45° OFFSET CLAMP MOUNT REAR FOLDING SIGHT P/N: 30878

The sights attach securely to the 12 o'clock rail position. Includes an elevation and windage adjustable 200-600 Meter Micro Rear Sight. Improved mounting base.



## 45° OFFSET CLAMP MOUNT FRONT FOLDING SIGHT P/N: 31592

The sights attach securely to the 12 o'clock rail position. Includes an elevation adjustable Micro Front Sight, Improved mountina base.



## 45° OFFSET CLAMP MOUNT FOLDING SIGHT KIT

P/N: 31593

The sights attach securely to the 12 o'clock rail position and, once deployed, a quick roll of the rifle is all that's needed to acquire a usable sight picture. When not required the sights fold neatly to the right of the rifle's top rail. Includes an elevation adjustable 200-600 Meter Micro Rear Sight and finger adjustable Micro Front Sight assembly. Improved mounting base.

## SIGHTING ACCESSORIE



## **ONE-PIECE SCOPE MOUNT**

Scope Mounts for day optics. Fits any MIL-STD-1913 rail High Profile Scope Mount. Fits any MIL-STD-1913 rail system. system. 1.5" ring height. Available in Black and Taupe.

**30MM 34MM**  P/N: 24755 P/N: 25284



## RAISED AND EXTENDED NVG MOUNT

High Profile Scope Mount. Fits any MIL-STD-1913 rail system. Quick detach, elevated rail segment that fits any MIL-STD-1913 rail. Quick detach, elevated rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, ow rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail. Quick detach, low rise rail segment that fits any Fits any MIL-STD-1913 rail segment that eve relief. 2" rina heiaht.

30MM **34MM** P/N: 30194



## RAILED HIGH RISER

accommodate greater elevations of any rail-attachable to accommodate minor elevations of any rail-attachable P/N: 30520 accessories. 1.25" Height



## P/N: 30657 RAILED LOW RISER

accessories, 0.75" Height



## P/N: 30779 45-DEGREE OFFSET RAIL MOUNT KIT P/N: 30480

rail-attachable accessory to 45°.



## AIMPOINT HIGH NVG MOUNT

High-profile riser block for an Aimpoint T1 Micro. Attaches to Offset Aimpoint Micro Mount is intended to be attached to any MIL-STD-1913 rail via a quick-detach throw lever.



## P/N: 30102 45° OFFSET AIMPOINT MOUNT

either the 3 o'clock or 9 o'clock rail position, placing the red dot to the side of a primary optic at a 45 degree angle.



## P/N: 30279 SCOPE RING

Offset Scope Ring Mount attaches an Aimpoint Micro optic to a Mounts to the optic tube, or replaces a KAC scope mount cap, Bubble level reference to ensure correct orientation of rifle magnified scope tube for use in close range engagements. Kit to place a Micro Aimpoint onto a magnified optic. includes 2 Knight's Aimpoint Micro Battery Cap Assemblies.

P/N: 20654 34MM P/N: 30108



## AIMPOINT MICRO MOUNT, SCOPE MOUNTED

P/N: 30134

P/N: 31649

34MM



## **RAIL MOUNT ANTI-CANT DEVICE**

for increased consistency. Compact enough to fit under most optics with no side protrusion/snag hazard.

P/N: 30855

## NEW CONTROL ACCESSORIES



## NEW

## MODULAR SELECTOR KIT P/N: 32393

Kit includes multiple selector options to suit individual shooter preferences. There is the choice of any combination of short or long left or right side selectors, and a semi-flush indicator that provides a visual indication of the rifle's firing mode only. Installation is a simple, drop-in procedure. Compatible with both SR-15/AR-15 and SR-25 platforms.



# NEW

## SEMI-AUTO 2-STAGE DROP-IN TRIGGER P/N: 25362

2-Stage, Match 4.5 lbs pull. Weight 2.4 oz NSN :1005-01-592-0663





## ENHANCED MAGAZINE RELEASE KIT P/N: 32394

Enlarged engagement area button is easily installed by replacing any standard, mil-spec magazine release button. Requires no modification to the host firearm.









